

## XS-MP61

### 6½" Dual Cone Marine Speakers



- 60 W Max Input Power
- 6½" Dual Cone
- Water-Resistant Construction
- Rust-Resistant Polycarbonate Frame and Grille
- Strontium Magnet

#### Specifications

##### Speaker

**XS-MP61** Dual Cone Type  
Woofer: 16 cm (6½ in.),  
Polypropylene Cone Type

**XS-MP62** Coaxial 2-way  
Woofer: 16 cm (6½ in.),  
Polypropylene Cone Type;  
Tweeter: 5.2 cm (2⅛ in.),  
Polypropylene Cone Type

##### Maximum Input Power

**XS-MP61** 60 watts  
**XS-MP62** 140 watts

##### Rated Input Power

**XS-MP61** 20 watts  
**XS-MP62** 35 watts

4 ohms

##### Impedance

##### Sensitivity

**XS-MP61** 90 dB/W/m  
**XS-MP62** 91 dB/W/m

##### Frequency Response

**XS-MP61** 40-20,000 Hz  
**XS-MP62** 35-26,000 Hz

##### Crossover Frequency

N/A

##### Weight (per speaker)

**XS-MP61** Approx. 750 g (1 lb. 10 oz.)  
**XS-MP62** Approx. 1.5 kg (3 lb. 5 oz.)


## XS-MP62

### 6½" 2-Way Marine Speakers




- 140 W Max Input Power
- 6½" Woofer, 2⅛" Tweeter
- Water-Resistant Construction
- Rust-Resistant Polycarbonate Frame and Grille
- Strontium Magnet

#### XS-MP61 Dimensions

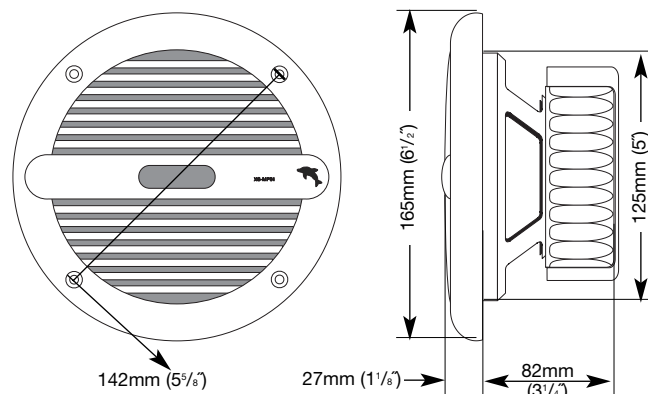

#### XS-MP62 Dimensions

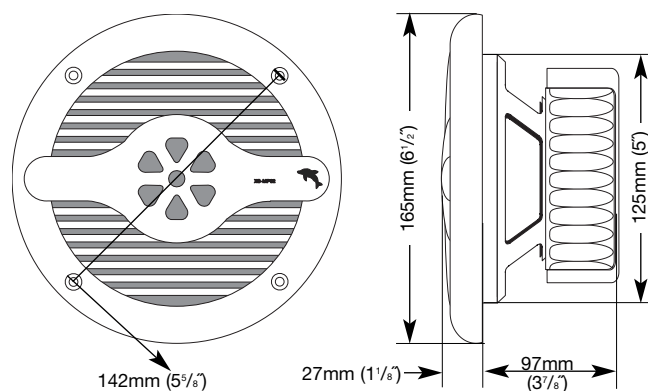

Design and specifications subject to change without notice.